


HEAT PROOF ELECTRIC VINYL WIRE  
UL1015, AWG18, 105°C ( $\rho = 1500 \pm 50$ )


OPERATING PRESSURE CHANGES ACCORDING  
TO CHANGE OF AMBIENT TEMP ON WATER  
PROOF TYPE

AMBIENT TEMP	-20°C	70°C	100°C
CHANGE OF CHARACTERISTICS	-0.2 bar -2.84 psi	+0.25 bar +3.56 psi	+0.4 bar +5.69 psi



LABEL


25 NO 10 psi TS -22/212°F 8A 240V AC	1.7 NO 0.7 bar PS 45 bar TS -30/85°C 4A 250V AC	ACB-2UC60W 061F9058	MFG. No. Danfoss
--------------------------------------------	----------------------------------------------------------	------------------------	---------------------

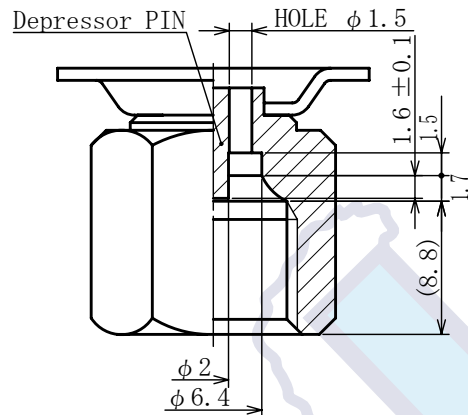

(2:1)

★CONFIRMATION OF DESIGN VALIDITY

We manufacture the product based on the specifications described in this drawing. Please check the safety and validity in the product design in consideration that the product is conformed to the system or not when using.

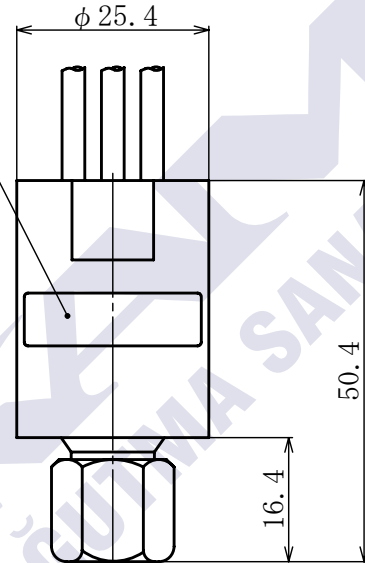


HEX 14

7/16-20 UNF FOR FLARE  
With Depressor pin

SEP. 03, 2010	1	REV. DIN Registration number
DATE	SIGN	CHANGE CONTENT

OPERATING PRESS. CHARACTERISTICS.	OPERATING PRESS. SETTING UNIT: bar {psi}		DIFFERENTIAL
	OFF	ON	
	0.7 ± 0.5 {10 ± 7}	1.7 ± 0.4 {25 ± 6}	—
ELECTRICAL RATINGS	RATED VOLTAGE (V)		A C
	RATED AMPS. (A)		250
UL TYPE	INDUCTIVE AMPS.		1~4
	RATED VOLTAGE (V)		A C
	RATED AMPS. (A)	PF Cos φ	120   240
	FULL LOAD AMPS.	0.75	8
	LOCKED ROTOR	0.45	48

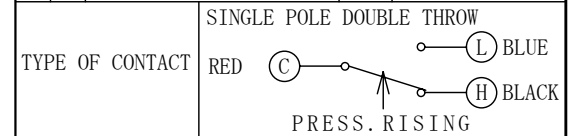

CONTACT RESISTANCE	LESS THAN 200 mΩ
INSULATION RESISTANCE	NOT LESS THAN 100 MΩ
DIELECTRIC STRENGTH	WITHSTAND 1500V AC FOR ONE MINUTE
MAX. PRESSURE	35 bar {500 psi}
AIR TIGHT PRESS.	40 bar {580 psi}
TEST PRESS.	50 bar {725 psi}
MAX. ALLOW. TEMP.	AMBIENT TEMP. -30 ~ 85°C (But no freeze) FLUID TEMP. -54 ~ 135°C
DURABILITY	10,000 TIMES
TÜV APPROVED	EN 12263 DIN 32733 (PSH/PSL 4B061) (4BPSh/PSL059/**)

UL FILE NO.	E43867, E31024		
C-UL FILE NO.			
Checked by	Date	Name	TYPE CB PRESSURE SWITCH
A. K.	JUN. 08 2005		
Designed by	Scale	Catalog Number	Drawing Number
M. Y.	1:1	ACB-2UC60W	N-CB-70176-1
Drawn by	Code No. :061F 9058		
N. M.			

